


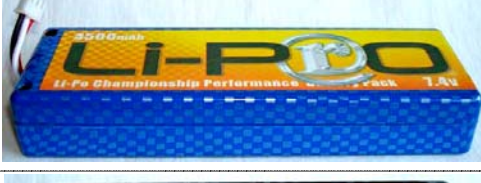


The Lithium Polymer (LiPo) Cells detailed below, are approved for use in the BRCA Touring Car Section 'Pro-Stock Class' only. During 2008, this list is not 'Frozen', and further cells can be added during the year. Battery packs must be able to be disconnected within the Car quickly without the use of tools. Direct soldering is not allowed. It is essential that LiPo cells are charged using a LiPo compatible charger. It is advisable to restrict charge rates to 1C. Users should follow the guidelines - "Advice on using LiPo Cells" published in the (EB) Section of the BRCA website.

| Origin of Supply | Cell Name, Shrink Details | Illustration only | Manufacturer Data. | BRCA measured Specification. | Approval Date |
|------------------|---------------------------------|---|---|--|---------------|
| Orion | Orion Race Spec. |  | Orion LiPo - 2S1P Cell 3800 mAh. 30C | Length: 137.5 mm. Width: 46.8 mm. High.: 21.1 mm. (Not inc. humps) Wt.: 228 grm. | 21.07.2008 |
| TrakPower | # TP32002S |  | TrakPower LiPo - 2S1P Cell 3200 mAh. 30C | Length: 137.5 mm. Width: 45.8 mm. High.: 20.8 mm. Wt.: 197 grm. | 21.07.2008 |
| TrakPower | # TP36002S |  | TrakPower LiPo - 2S1P Cell 3600 mAh. 30C | Length: 137.5 mm. Width: 45.6 mm. High.: 20.9 mm. Wt.: 213 grm. | 21.07.2008 |
| Ripmax | Impulse Power # 2S1P340020C |  | Ripmax LiPo - 2S1P Cell 3400 mAh. 20C. | Length: 137.7 mm. Width: 45.9 mm. High.: 21.7 mm. (Not inc. humps) Wt.: 201 grm. | 21.07.2008 |
| CML | SMC Lightning Volts # 4028LD |  | SMC LiPo - 2S1P Cell 4000 mAh. 28C Wires have side exit only. | Length: 136.1 mm. Width: 46.5 mm. (Not inc. wires) High.: 20.4 mm. Wt.: 243 grm. (Includes wires) | 23.06.2008 |
| Much More | Tekin Power Cell |  | Tekin LiPo - 2S1P Cell 3400 mAh. 23C | Length: 137.7 mm. Width: 45.9 mm. High.: 21.5 mm. (Not inc. humps) Wt.: 200 grm. | 23.06.2008 |
| Demon Products | DL3600 |  | Demon Power Products LiPo - 2S1P Cell 3600 mAh. 25C | Length: 138.6 mm. Width: 46.8 mm. (Not inc. wires) High.: 22.2 mm. (Not inc. humps) Wt.: 255 grm. (Includes wires) | 19.05.2008 |
| Over - tec | Tornado Extreme GP #50004RS1801 |  | Yungtong LiPo - 2S1P Cell 5000 mAh. 20C Wires have side exit only. | Length: 136.9 mm. Width: 45.2 mm. (Not inc. wires) High.: 22.9 mm. Wt.: 282 grm. (Includes wires) | 19.05.2008 |
| CML | Reedy LiPo Pro. #703 |  | Reedy LiPo - 2S1P Cell 5000 mAh. 20C | Length: 138.9 mm. Width: 46.0 mm. High.: 23.7 mm. (Not inc. wires or humps) Wt.: 295 grm. (Includes wires) | 19.05.2008 |

| | | | | | |
|----------------|------------------|---|---|---|------------|
| Orion | Orion Race Spec. |  | Orion LiPo - 2S1P Cell 3600 mAh. 25C | Length: 137.7 mm. Width: 46.8 mm. High.: 23.2 mm. (Not inc. humps) Wt.: 228 gm. | 14.04.2008 |
| Orion | Platinum Edition |  | Orion LiPo - 2S1P Cell 4800 mAh. 15C | Length: 136.9 mm Width: 45.1 mm. High.: 23.1 mm. Wt.: 256 gm. | 14.04.2008 |
| Schumacher | CORE-RC |  | Core-RC LiPo - 2S1P Cell 5000 mAh 25C | Length: 136.9 mm. Width: 46.5 mm. High.: 23.6 mm. (Not inc. wires) Wt.: 279 gm. (Includes wires) | 10.03.2008 |
| Demon Products | DL5000 |  | Demon Power Products LiPo - 2S2P Cell 5000 mAh. 20C Wires have side exit only. | Length: 136.9 mm. Width: 45.1 mm. (Not inc. wires) High.: 23.0 mm. Wt.: 287 gm. (Includes wires) | 03.03.2008 |
| TrakPower | # TP32002S |  | TrakPower LiPo - 2S2P Cell 3200 mAh. 20C | Length: 137.4 mm. Width: 45.6 mm. High.: 21.3 mm. Wt.: 193 gm. | 03.03.2008 |
| TrakPower | # TP49002S |  | TrakPower LiPo - 2S1P Cell 4900 mAh. 25C | Length: 137.3 mm. Width: 45.6 mm. High.: 23.4 mm. Wt.: 267 gm. | 03.03.2008 |
| Trinity | Reference |  | Trinity LiPo - 2S1P Cell 4500 mAh. -C | Length: 137.4 mm. (Not inc. wires) Width: 47.0 mm. High.: 23.7 mm. Wt.: 242 gm. (Includes wires) | 03.03.2008 |
| Orion | Carbon Edition |  | Orion LiPo - 2S1P Cell 3200 mAh. 20C | Length: 137.5 mm. Width: 46.5 mm. High.: 23.2 mm. (Not inc. humps) Wt.: 197 gm. | 03.03.2008 |
| | | | | | |

Paul Worsley. (BRCA Electric Board Tech. Officer) 21.07.08.